

STABFAST™ MK II ALU





Stabilisation system STAB FAST™ MK II

- TÜV and CE certified
- Easy and safe system - also for difficult vehicle positions
- Multiple uses - for all cars, estates, mini vans and truck cabs
- Compact - for space-saving storage in the vehicle
- Quick and easy installation

New and improved features:

- Automatic telescopic locking
- Pneumatic telescopic damping
- More locking positions
- Improved strap retractor
- Bigger hole in foot for fixing
- Improved hook knife blade
- Reflective markings
- Weighs less by aluminum construction

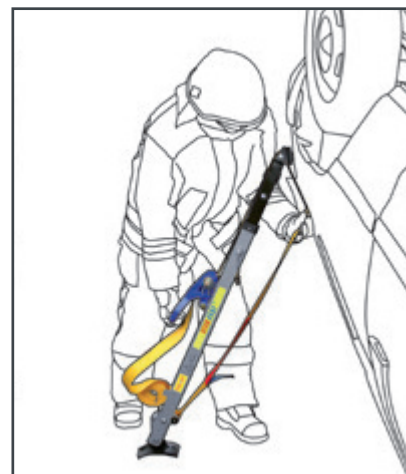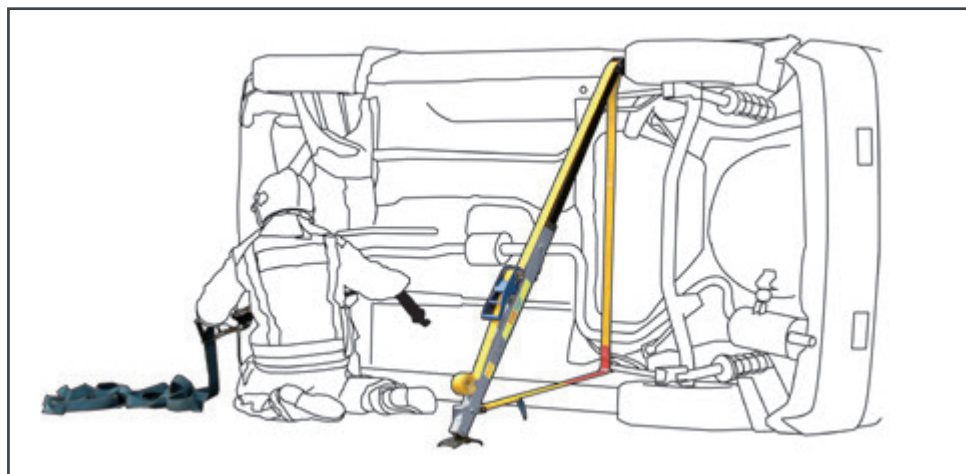

The STAB FAST™ MK II ALU is available in 3 versions:

STAB FAST™ MK II ALU, STAB FAST™ MK II ALU Basic and STAB FAST™ MK II ALU XL

STAB FAST™ MK II ALU
consisting of:
Three struts, hook
blade, wedge and two
transport bags

**STAB FAST™ MK II ALU
Basic**
consisting of:
Two struts and
transport bag

**STAB FAST™ MK II ALU
XL**
consisting of:
Two struts, hook blade
and transport bag

Length	1,070 mm	1,070 mm	1,500 mm
Extended length	1,720 mm	1,720 mm	2,500 mm
Weight per strut	7.2 kg	7.2 kg	10.3 kg
Maximum load in longitudinal direction of strut	1,500 kg	1,500 kg	2,500 kg
Length of strap	6,000 mm	6,000 mm	10,000 mm
Maximum load of strap	5,000 kg	5,000 kg	5,000 kg
Maximum load of hook	2,500 kg	2,500 kg	2,500 kg
Size bag	1,100 x 300 x 120 mm	1,100 x 300 x 120 mm	1,600 x 500 x 180 mm
Weight	33 kg	18 kg	30 kg
ID-No.	ZA-ST120000	ZA-RT-BAG2-ALU	ZA-ST120015

Certification STABFAST™ MK II ALU

STAB FAST™ MK II ALU is CE certified in accordance with the Machinery Directive 98/79/EC and conforms to the EN standards EN1050 - EN292-1 - EM292-2 EN414 - EN294 - EN249.



PT Rescue
19 Ricketts Rd,
Mt Waverley,
VIC 3149

P: +61 3 9562 8800

F: +61 3 9562 8080

E: rescue@pthydraulics.com.au