


SP 300 E2

**LIGHT AND BALANCED
FOR REAL OPERATIONS.**





Scan this QR code
for further information.



SP 300 E2

The optimised SP 300 E2 eDRAULIC spreader has undergone significant improvements – especially with regard to weight – and provides an optimum mix of strength, opening and handling.

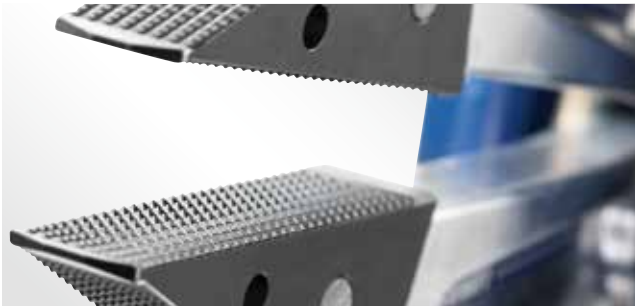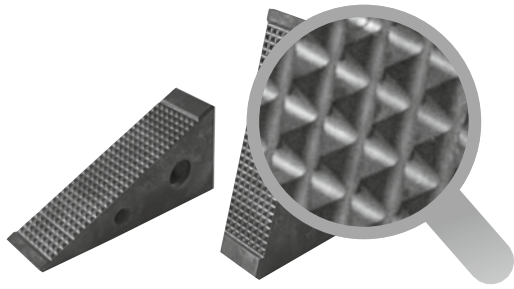

SUPERIOR DIAMOND TIPS!

Our specially developed diamond tips are especially designed for vehicle extrication. Their extra-flat tips and special surface finish give them an extremely good grip. They will enable you to penetrate even the narrowest gaps for faster and safer rescues.

In use



Accessories

Quick-change tip
Multifunction tip for additional applications including peeling, crushing and pulling.



KSV 11 chain set

Length 6.6 ft./2 x 2 m

Advantages

- + Weight under 20 kg (without battery)
- + Extremely balanced spreader for excellent handling
- + Powered by an optimised high-performance rescue battery
- + Rescue without power units and hoses
- + Flat diamond tips with perfect grip
- + Standard delivery with carrying belt

Technical data	SP 300 E2
Spreading force	9,000 – 32,600 lbs/36 – 145 kN
Spreading distance	23.9 in./608 mm
Pulling force up to	6,300 lbs/28 kN
Pulling distance	18.7 in./475 mm
Dimensions l x w x h	34.7 x 14.6 x 11.3 in./881 x 371 x 287 mm
Weight*	42.9 lbs/19,5 kg
Protection class	IP 54

*Weight without battery or power supply