SP 300

THE LIGHT SPREADER FOR VEHICLE EXTRICATION.

SP 300

Thanks to its perfect mix of strength, blade opening and low weight, the new SP 300 is perfectly suited to vehicle extrication. Many improved details distinguish the SP 300 from conventional spreaders. For example, its narrow spreader arms and more compact dimensions result in optimum handling. Standard equipment: diamond tips

WITH *DIAMOND TIPS!*

Our specially developed diamond tips are especially designed for vehicle extrication. Their extra-flat tips and special surface finish give them an extremely good grip. They will enable you to penetrate even the narrowest gaps for faster and safer rescues.

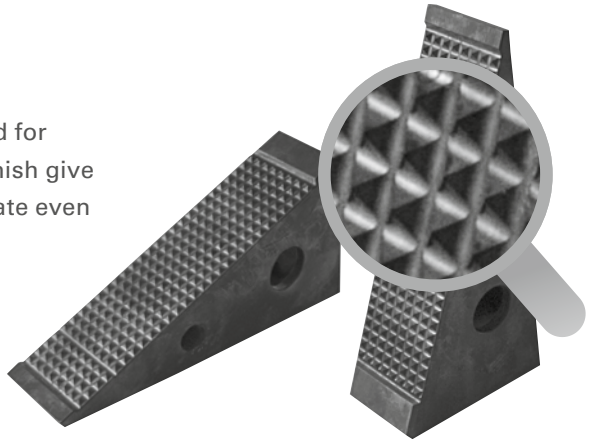

Advantages

+ Even better performance in practice
+ Diamond tips for improved vehicle extrication
+ Extremely flat tips to penetrate the narrowest gaps
+ Special "diamond" surface finish for excellent grip

Accessories

Quick-change tip package "Universal"
Multifunction tip for additional applications including peeling, crushing and pulling.

KSV 11 chain set

Length	2 × 6.6 ft./2 × 2 m

In use

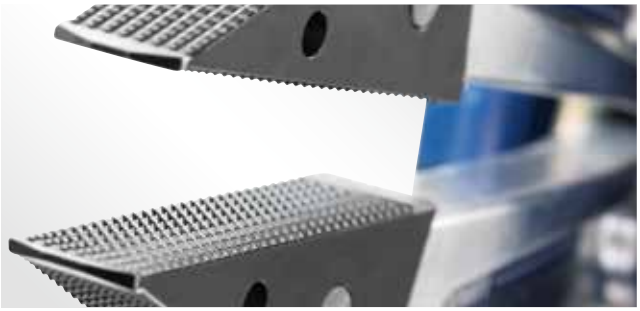

Technical data	SP 300
Spreading force	8,090 - 28,100 lbs/36 - 125 kN
Spreading distance	23.8 in./605 mm
Pulling force up to	7,000 lbs/31 kN
Pulling distance	18.7 in./475 mm
Oil requirement	8.4 cu. in./137 cm³
Dimensions : l × w × h	29.5 × 14.0 × 10.0 in./750 × 355 × 255 mm
Weight	38.6 lbs/17.5 kg
Certification	NFPA 1936
EN-Classification	AS 36/605 - 18

WEBCODE: yceutw