

Leading manufacturer of extreme fire blankets.

The content in this brochure might be incorrect

Our story

On the 18th of January 2014 a fire in Lærdal, Norway damaged 60 buildings from were 42 of the buildings were totally destroyed.

From these 42 buildings, four were of historical value and one building was a listed building. The fire in Lærdal was the biggest city fire in Norway since World War II and was so destructive due to the strong wind that made the fire spread easily.

This fire initiated an idea that turned into the quest of making a fire blanket that could protect, prevent and stop fire. Today, fire blankets are available under the brand name Bridgehill® and we are proud to be the leading manufacturer of extreme fire blankets.

The fire blankets comes in different sizes, and are made for both the professional market and for first responders.

The Bridgehill fire blankets can be used on a wide range of objects, starting with small objects such as a mobile phone, electric tools and e- scooters, to bigger objects such as vehicles, forklifts and buildings.

The fire blankets even blocks and isolate lithium battery fires.

Want to know more? Visit our website or contact us

bridgehill.com 🔛 post@bridgehill.com 🕻 +47 33 50 98 70





WE SIMPLY BLOCK FIRE










THE GREENEST WAY









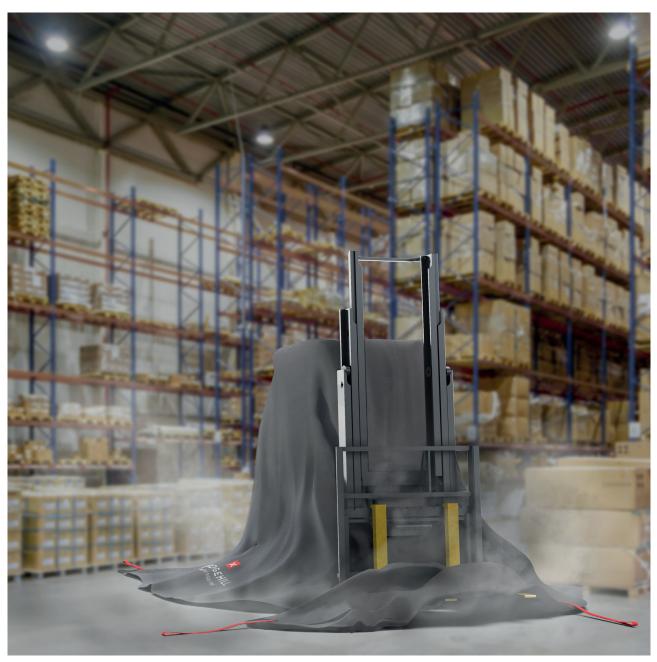

Forklift Fire Blanket






PROFESSIONAL

CAR PRO X

Probably the world's most extreme fire blanket for professionals

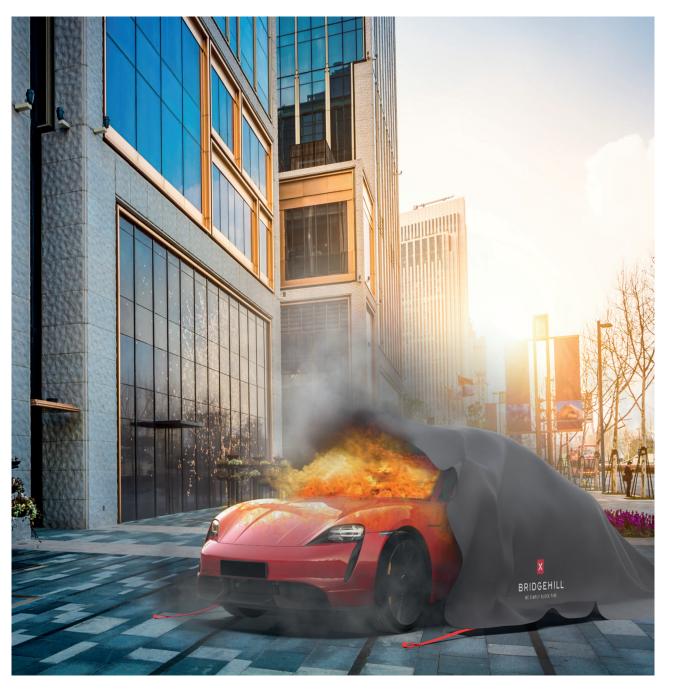

Norway - post@bridgehill.com | phone: +47 33 50 98 70 | bridgehill.com

PROFESSIONAL

CAR PRO X



Cars

- Controls fire in any car within seconds
- The most efficient solution for isolating fire in electric vehicles
- Reusable for up to 30 car fires
- Immediate Isolation of toxic gases and smoke, reducing carcinogen exposure
- Suitable for normal size vehicles including SUVs, like the Volvo XC90 and Land Rovers

Ideal for:

Underground parking garages – Charging stations – Ferries – Gas stations – Workshops– Car dealers – Tunnels – Parking lots



Lithium battery

CAUTION:

Always fold the fire blanket to create two layers when using it on open lithium batteries.

- · Quickly blocks the fire in lithium battery
- Prevents spread of fire

Ideal for:

Manufactures – Open battery fires - Electric bikes and scooters – Electric tools – Ferries – Trains – Trucks

Size:

 \pm 6 × 8 m – Weight: \pm 28 kg

Smartbag:

- Airtight bag
- Comes with shoulder straps and handles
- Instruction manual in four languages
- Includes repair kit

Repair kit:

 Use to sew the fire blanket in case of holes coming from sharp objects





For instruction videos scan QR code



BRIDGEHILL® WE SIMPLY BLOCK FIRE

For proactive use on a burning building

When attached to the wall (before the wall is burning) you create a firewall making this the last wall to fall due to the block of oxygen from the outside.

How to attach:

The fire blanket can be stapled on the wall.



For a building you want to protect

Blocks most of the radiant heat.

How to attach:

- Hang the fire blanket on metal gutters with carabiners using the eyelets of the fire blanket.
- Staple the fire blanket to a wooden wall.
- Hang the fire blanket using fireproof ropes from the eyelets to anything you can tie to.

Ideal for:

Areas with a high density of buildings – Listed buildings – Buildings with historical value – Fire Stations

WARNING:

Always use professional fire equipment with SCBA when packing and reusing the fire blanket- or opening the bag. Make sure the fire blanket is dry before storing it inside the smartbag. By following this procedure there will be no need to clean the blanket.

Fire in electric vehicles: If you can hear a strong fuzz sound about every 2-15 seconds, you have a thermal runaway. The thermal runaway stops when the sounds stops. Despite this, the battery might reignite at any time therefore, leave the blanket on until the battery can be disassembled.



TECHNICAL SHEET

CAR PRO X

PROFESSIONAL	
SKU:	103251
Size/Weight:	± 6 × 8 meters (48 m²) ± 28 kg
Core material:	340 gsm graphite
Coating:	±160 gsm silicone polymer (flames may occur during first time use). In fires with high levels of conduction heat, flames may appear from the coating of the fire blanket. This will not alter the performance of the fire blanket.
Edge of blanket:	Eyelets every meter for when using the fire blanket as a fire sail.
Car sizes:	Handles normal size vehicles up to SUVs such as Land Rovers, XC90 etc.
Main usage:	 As fire blanket: Cover objects to efficiently block fire As fire sail: Put vertically on the object to stop the spread of fire
Smartbag:	Airtight bag. Smartbag care and maintenance: Use silicon grease on the zipper to keep the bag airtight.

Technical specification:

Core Fabric			Unit	Tolerance
Yarn	Warp Weft	396 396	Tex Tex	± 5 ± 5
Yarn count	Warp Weft	4.5 4.0	Ends/cm Ends/cm	± 5 ± 5
Tensile strength	Warp Weft	3000 3600	N/50mm N/50mm	2 2
Area weight	-	340	G/m2	± 10%
Thickness	-	0.32	Mm	± 5%
Weave pattern	– 4H satin			
Service temperatures on core fabric	Short term ± 2500 °C * Long term ± 1500 °C			

*The service temperatures are based on conditions where no oxygen is present underneath the fire blanket.





FIRST RESPONDER

CAR STANDARD

Controls fire in any vehicle within seconds



CAR STANDARD



Product information

- · Controls fire in any vehicle within seconds
- Isolate fire in electric vehicles
- Immediate isolation of toxic gases and smoke, protecting civilians from carcinogen
- exposure
- Isolate any small fire
- · Suitable for normal size vehicles including SUVs like the Volvo XC90 and Land Rovers
- Delivered in a smartbag
- EN 13501-1: Reaction to fire classification A1
- EN ISO 1182
- EN ISO 1716

Ideal for places with a high concentration of cars

Underground parking garages – Ferries – Gas stations – Charging stations – Workshops– Car dealers – Tunnels – Parking lots

How to use Handled by:

- Place the fire blanket on the ground. Center it in front of- or behind the car and roll it out.
- 2. Two people should grab each their handle and safely pull the fire blanket over the car in one continuous movement.
- 3. Make sure the fire blanket is tight all the way to the ground and leave the fire blanket on for minimum 20 minutes. Wait for firefighters to assess the situation further.

ALWAYS CALL THE FIRE DEPARTMENT!



BRIDGEHILL® WE SIMPLY BLOCK FIRE



Fire in electric cars:

In many cases you might hear a strong fuzzing sound, which indicates a thermal runaway. We recommend to leave the fire blanket on until the vehicle has been transported to a safe place and assessed by professionals. Remember that a battery might reignite at any time.



BRIDGEHILL® WE SIMPLY BLOCK FIRE

CAR STANDARD

FIRST RESPONDER

SKU:	101251		
Size/Weight:	± 6 × 8 meters (48 m²) ± 28 kg		
Core material:	380 gsm pyroxene		
Coating:	± 120 silicone polymer (flames may occur during first time use). In fires with high levels of conduction heat, flames may appear from the coating of the fire blanket. This will not alter the performance of the fire blanket.		
Car sizes:	Handle cars up to normal SUV size like Land Rover, XC90 etc.		
Main usage:	Fossil fuel vehiclesElectric/hybrid vehicles		
Smartbag:	Airtight bag. Smartbag care and maintenance: Use silicon grease on the zipper to keep the bag airtight and smell free.		

Technical specification:

Core Fabric			Unit	Tolerance
Yarn	Warp Weft	300 165	Tex Tex	± 5%
Yarn count	Warp Weft	8.0 8.0	Ends/cm Ends/cm	± 5%
Tensile strength (typical)	Warp Weft	3200 2500	N/50mm N/50mm	2
Thickness	_	0.40	Mm	± 5%
Weave pattern	_	Plain	-	-
Service temperature on core fabric	Short term ± 1600 °C Long term ± 800 °C			

WARNING:

Avoid inhaling smoke from the burning vehicle. Do not put yourself at unnecessary risk, call the fire department!

In fires with high levels of conduction heat, flames may appear from the coating of the blanket. This will not alter the purpose of the blanket.




Extra



FIRST RESPONDER

PALLET TRUCK/ FORKLIFT STANDARD

Controls fire in forklifts and pallet trucks within seconds

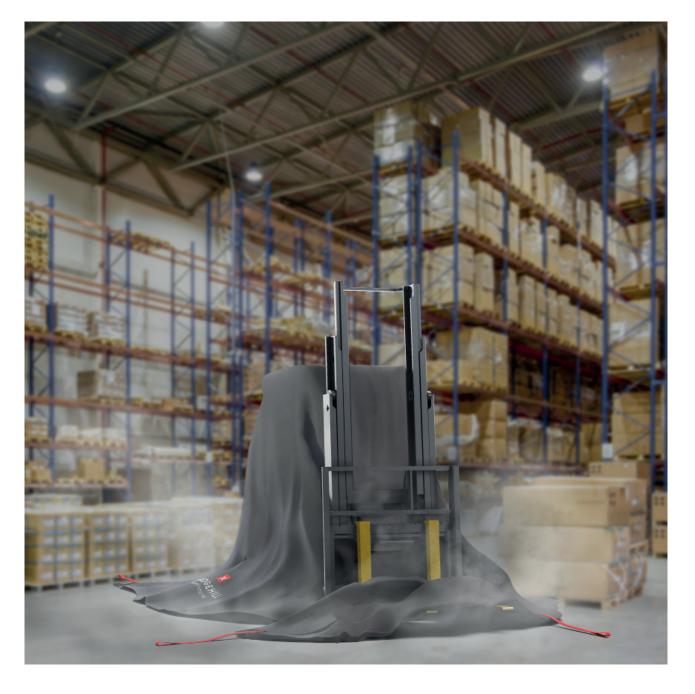

FIRST RESPONDER

PALLET TRUCK/FORKLIFT STANDARD

BRIDGEHILL® WE SIMPLY BLOCK FIRE



Product information

- Controls fire in forklifts within seconds
- The most efficient solution for isolating fire in forklifts, even electric battery powered
- Immediately isolates toxic gases and smoke, protecting civilians from carcinogen exposure
- Protecting the goods and buildings from fire, reducing down time
- Delivered in a smartbag
- EN 13501-1: Reaction to fire classification A1
- EN ISO 1716: Determination of the gross heat of combustion
- EN ISO 1182: Non-combustibility test

Ideal for:

Warehouses – Ports – Factories – Manufacturing companies and other places where it is critical to control fire quickly Size/Weight:

Pallet truck: ± 5 × 5 m ± 15 kg





Forklift standard: ± 7 × 7 m ± 30 kg

How to use Handled by:

- 1. Place the fire blanket on the ground in front or behind the forklift and roll it out.
- 2. Two people should grab each their handle and safely pull the fire blanket over the forklift in one continuous movement.
- 3. On forklifts with a tall mast, cover the cabin not the mast. Please see illustration.
- 4. Make sure the fire blanket is tight all the way to the ground and leave the fire blanket on for minimum 20 minutes. Wait for firefighters to assess the situation further..

ALWAYS CALL THE FIRE DEPARTMENT!

Pallet truck: ± 5 × 5 m



Forklift standard: ± 7 × 7 m







Fire in electric forklifts: In many cases you might hear a strong fuzzing sound, which indicates a thermal runaway. We recommend to leave the fire blanket on until the vehicle has been transported to a safe place and assessed by professionals. Remember that a battery might reignite at any time.

BRIDGEHILL® WE SIMPLY BLOCK FIRE

TECHNICAL SHEET

PALLET TRUCK/FORKLIFT STANDARD

FIRST RESPONDER	
SKU:	Pallet Truck: 211227 Forklift Standard: 201252
Size/Weight:	Pallet Truck: ± 5 × 5 meters (25 m²) / ± 15 kg Forklift Standard: ± 7 × 7 meters (49 m2) / ± 30 kg
Core material:	380 gsm pyroxene
Coating:	± 120 silicone polymer (flames may occur during first time use). In fires with high levels of conduction heat, flames may appear from the coating of the fire blanket. This will not alter the performance of the fire blanket
Main usage:	Fossil fuel forkliftsElectric forklifts (isolating the fire in the battery)
Smartbag:	Airtight bag. Smartbag care and maintenance: Use silicon grease on the zipper to keep the bag airtight and smell free.

Technical specification:

Core Fabric			Unit	Tolerance
Yarn	Warp Weft	300 165	Tex Tex	± 5%
Yarn count	Warp Weft	8.0 8.0	Ends/cm Ends/cm	± 5%
Tensile strength (typical)	Warp Weft	3200 2500	N/50mm N/50mm	2
Thickness	_	0.40	Mm	± 5%
Weave pattern	-	Plain	-	-
Service temperature on core fabric	Short term ± 1600 °C Long term ± 800 °C			

WARNING:

Avoid inhaling smoke from the burning object. Do not put yourself at unnecessary risk, call the fire department!

In fires with high levels of conduction heat, flames may appear from the coating of the blanket. This will not alter the purpose of the blanket.






PROFESSIONAL/FIRST RESPONDER

LITHIUM FIRE BLANKET

The ultimate solution for blocking fire in open lithium batteries

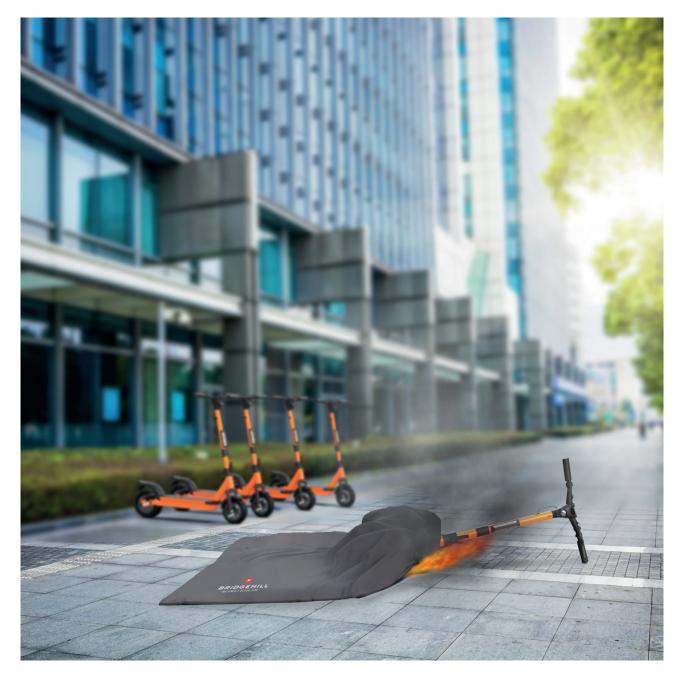

Norway – post@bridgehill.com | phone: +47 33 50 98 70 | bridgehill.com

PROFESSIONAL/ FIRST RESPONDER

LITHIUM



Product information

• The ultimate solution for blocking and isolating lithium battery firessuch as in open battery fires, e-scooters, and e-bikes

BRIDGEHILL® WE SIMPLY BLOCK FIRE

- Immediately Isolates toxic gases and smoke
- Protecting civilians from carcinogen exposure
- Delivered in a smartbag
- EN 13501-1: Reaction to fire classification A1
- EN ISO 1716: Determination of the gross heat of combustion
- EN ISO 1182: Non-combustibility test
- EN 1869:2019: Fire Blankets

Ideal for:

Car manufacturers – industries Involving lithium batteries – recycling stations – auto repair, and other workshops

How to use Handled by:

- 1. Gently cover the burning battery.
- For bigger batteries we recommend using a bigger fire blanket on top to prevent flames from coming out. Minimum a 5×5 m Bridgehill fire blanket.

WARNING:

Use proper protection and breathing apparatus (BA) due to the release of toxic gases from the burning battery. The blankets needs to fully cover the object, and leave it to the firefighters to assess the situation.

ALWAYS CALL THE FIRE DEPARTMENT!



For instruction videos scan QR code







BRIDGEHILL[®] WE SIMPLY BLOCK FIRE

TECHNICAL SHEET

LITHIUM

PROFESSIONALS/ FIRST RESPONDER

SKU:	Lithium Standard: 504209 Lithium Large: 504212
Size/Weight:	Lithium Standard: ± 1,8 × 1,8 m / ± 8 kg Lithium Large: ± 3 × 4 m / ± 27 kg
Core material:	Pyroxene, selicium filt, and BridgeTech™coating - a seven layer solution
Main usage:	Isolate fire in open lithium batteries
Smartbag:	Airtight bag

Technical specification:

Fabric			Unit	Tolerance
Yarn	Warp Weft	300 165	Tex Tex	± 5%
Yarn count	Warp Weft	8.0 8.0	Ends/cm Ends/cm	± 5%
Tensile strength (typical)	Warp Weft	3200 2500	N/50mm N/50mm	2
Thickness	_	1.0	Cm	± 5%
Weave pattern	_	Plain	-	-
Service temperature on core fabric	Short term ± 1600 °C Long term ± 1200 °C			

In fires with high levels of conduction heat, flames may appear from the coating of the blanket. This will not alter the purpose of the blanket.

WARNING:

Always use proper protection and breathing apparatus (BA) due to the release of toxic gases from the burning battery.





PROFESSIONAL/FIRST RESPONDER

EXTREME SERIES

Probably the world's most extreme fire blanket



PROFESSIONAL/FIRST RESPONDER





Product information

- Isolate and extinguish small fires
- Blocks any fire, even small lithium battery fires
- Multipurpose
- Immediately isolates toxic gases and smoke, protecting civilians from carcinogen exposure
- Comes in a smartbag
- Requires no maintenance
- Metal chain integrated to add weight for easier use

Ideal for:

Battery fires - Restaurant kitchens – Industry tools – The recycling industry – Car manufacturers – Workshops – Shops or businesses that store small or large amounts of lithium batteries - Battery manufactores- Marine - Aviation - Military

Small:	Medium:	
± 1,5 × 1,5 m	± 3 × 3 m	
± 7,5 kg	± 21 kg	




How to use Handled by:

- 1. Take the fire blanket out of the smartbag.
- 2. Gently cover the burning object.
- 3. Make sure the fire blanket is tight all the way around the burning object. Wait at least 20 minutes.

For fire in electric scooters/ tools etc. Wait for firefighters to assess the situation further!

ALWAYS CALL THE FIRE DEPARTMENT!







For instruction videos scan QR code



BRIDGEHILL® WE SIMPLY BLOCK FIRE

TECHNICAL SHEET

EXTREME

PROFESSIONAL/FI	RST RESPONDER		
SKU:	Extreme Small: 504210 Extreme Medium: 504211		
Sizes/Weight:	Small: Medium: ± 1,5 × 1,5 m ± 3 × 3 m ± 7,5 kg ± 21 kg		
Core material:	Total six layers solution. Two layers of Pyroxene.		
Coating:	Four layers of BridgeTech [™] coating (Flames may occure during first time use). ± 550 gsm silicone In fires with high levels of conduction heat, flames may appear from the coating of the fire blanket. This will not alter the performance of the fire blanket.		
Egde on blanket:	Metal chain sewed in aorund the egdes to add weight.		
Main usage:	Blocks any small fire, even lithium battery fires.		
Smartbag:	Airtight bag. Smartbag care and maintenance: Use silicon grease on the zipper to keep the bag airtight and smell free.		

Technical specification:

Core Fabric			Unit	Tolerance
Yarn	Warp	300	Tex	± 5
	Weft	165	Tex	± 5
Yarn count	Warp	8	Ends/cm	± 5
	Weft	8	Ends/cm	± 5
Tensile strength	Warp	3200	N/50mm	2
	Weft	2500	N/50mm	2
Area weight	-	1200	G/m2	± 10%
Thickness	_	0.40	Mm	± 5%
Weave pattern	-			4H satin
Service temperatures	Short term ± 1600 °C			
on core fabrics	Long term ± 800 °C			



ADDITIONAL EQUIPMENT

EXTRA



TRAINING CAR FIRE BLANKET

X

BRIDGEHILL®



Product information

- Training fire blankets designed for use on cars
- Fire blankets for dry training only, not for use on fire

Size/Weight:

Training Car fire blanket

- ± 6 × 8 m
- ± 26 kg

SKU:

101250







For instruction videos scan QR code

How to use Handled by:

- Place the fire blanket on the ground. Center it in front of- or behind the car and roll it out.
- 2. Two people should grab each their handle and safely pull the fire blanket over the car in one continuous movement.
- 3. Make sure the fire blanket is tight all the way to the ground and leave it on.







PROFESSIONAL/FIRST RESPONDER TRAINING FORKLIFT FIRE BLANKET

X

BRIDGEHILL® WE SIMPLY BLOCK FIRE



Product information

- Training fire blankets designed for pallet truck and forklift
- Fire blankets for dry training only, not for use on fire

Size/Weight:

Training Forklift fire blanket:

- ± 7 × 7 m
- ± 28 kg

SKU:

201251







For instruction videos scan QR code

FIRE BLAN

How to use Handled by:

- 1. Place the fire blanket on the ground in front or behind the forklift and roll it out.
- 2. Two people should grab each their handle and safely pull the fire blanket over the forklift in one continuous movement.
- 3. On forklifts with a tall mast, cover the cabin not the mast. Please see illustration.
- 4. Make sure the fire blanket is tight all the way to the ground.





BRIDGEHILL' WE SIMPLY BLOCK FIRE

FIRE BLANKET CABINET



Product information

- Suitable for all fire blankets
- A solid cabinet with a lockable door
- Emergency Break Glass for quick access to the fire blanket
- Easy to assemble
- To be mounted on the wall

Ideal for:

Parking lots – Garages – Ferries – Gas stations – Charging stations – Workshops– Car dealers – Warehouses – Tunnels – Factories

Size: 90 × 30 × 35 cm

Weight: 15 kg

Material: Steel

SKU:

900002

Scan the QR code to watch the assembly video









bridgehill.com



A division of PT Hydraulics Australia PTY LTD 19 Ricketts Rd Mt Waverley VIC 3149 ph: 03 9562 8800 e: rescue@ptha.com.au www.ptrescue.com.au